

ENERGY RATINGS

Direct Glazed Smooth Doors & Sidelites



Updated 10-10-2024
ENERGY STAR v7.0

DIRECT GLAZED SMOOTH FIBERGLASS: DOORS and SIDELITES

	Does not meet ENERGY STAR v7.0 criteria for All Zones
	Does not meet ENERGY STAR v7.0 criteria for Northern Zone
	Does not meet 2023 Florida Energy Code Criteria for SHGC

DOORS, TGI-M-11 NOTE: CPD # would equal the TGI-M-X + Number below the U-Factor-SHGC, Example: TGI-M-11-00192-00001

Product Description	SWING	Frame (Jamb)	GLAZING	1/4-LITE			1/2-LITE			3/4-LITE			FULL LITE		
				U-factor	SHGC	VT	U-factor	SHGC	VT	U-factor	SHGC	VT	U-factor	SHGC	VT
				0.20	0.08	0.10	0.22	0.15	0.19	0.24	0.19	0.24	0.26	0.25	0.33
Optilite S1 16/Air/Lami (3mm/9mm) 1" IG	IS/OS	Wood	Dual Pane - Low E Laminated PDLC	00031-00001			00063-00001			00095-00001			00127-00001		
Optilite S1 16/Air/Clear (3mm/3mm) 1" IG	IS/OS	Wood	Dual Pane - Low E (Clear/Internal Grill) Air	0.20	0.08	0.10	0.23	0.15	0.19	0.26	0.20	0.26	0.28	0.26	0.34
				00023-00001			00055-00001			00087-00001			00119-00001		
Optilite S1 16/Air/Lami (3mm/9mm) 1" IG	IS/OS	PVC	Dual Pane - Low E Laminated PDLC	0.19	0.08	0.10	0.21	0.15	0.19	0.23	0.19	0.25	0.25	0.25	0.33
				00160-00001			00192-00001			00224-00001			00256-00001		
Optilite S1 16/Air/Clear (3mm/3mm) 1" IG	IS/OS	PVC	Dual Pane - Low E (Clear/Internal Grill) Air	0.20	0.08	0.10	0.23	0.15	0.19	0.25	0.20	0.26	0.28	0.26	0.34
				00152-00001			00184-00001			00216-00001			00248-00001		

SIDELITES, TGI-M-12 NOTE: CPD # would equal the TGI-M-X + Number below the U-Factor-SHGC, Example: TGI-M-12-00252-00001

Product Description	SWING	Frame (Jamb)	GLAZING	1/4-LITE			1/2-LITE			3/4-LITE			FULL LITE		
				U-factor	SHGC	VT	U-factor	SHGC	VT	U-factor	SHGC	VT	U-factor	SHGC	VT
				0.19	0.08	0.10	0.22	0.14	0.19	0.23	0.19	0.25	0.26	0.25	0.33
Optilite S1 16/Air/Lami (3mm/9mm) 1" IG	IS/OS	Wood	Dual Pane - Low E Laminated PDLC	00031-00001			00063-00001			00095-00001			00127-00001		
Optilite S1 16/Air/Clear (3mm/3mm) 1" IG	IS/OS	Wood	Dual Pane - Low E (Clear/Internal Grill) Air	0.20	0.08	0.10	0.23	0.14	0.19	0.25	0.19	0.26	0.28	0.26	0.34
				00023-00001			00055-00001			00087-00001			00119-00001		
Optilite S1 16/Air/Lami (3mm/9mm) 1" IG	IS/OS	PVC	Dual Pane - Low E Laminated PDLC	0.19	0.08	0.10	0.21	0.14	0.19	0.23	0.19	0.25	0.25	0.25	0.33
				00157-00001			00188-00001			00220-00001			00252-00001		
Optilite S1 16/Air/Clear (3mm/3mm) 1" IG	IS/OS	PVC	Dual Pane - Low E (Clear/Internal Grill) Air	0.20	0.08	0.10	0.23	0.14	0.19	0.25	0.19	0.26	0.27	0.26	0.34
				00149-00001			00180-00001			00212-00001			00244-00001		

Door	Glass Size	Door or Glass size
1/4 lite	≤410	325/425 Craftsman Rectangle
1/2 lite	≤900	330/430 Half Lite
3/4 lite	≤1100	440 3/4 Lite
Full lite	>1100	360/460 Full Lite
Opaque		

Sidelite	Glass Size	Sidelite or Glass size
1/4 lite	≤65	
1/2 lite	≤281	230 Half Lite
3/4 lite	≤391	240 3/4 Lite; 160 Full Lite
Full lite	>391	
Opaque		

ENERGY STAR® Version 7.0

Certification Criteria for Residential Doors




ENERGY STAR® Certification Criteria for Residential Doors

DOORS			
Glazing Level	Climate Zone	U-Factor ¹	SHGC ²
Opaque	All Zones	≤ 0.17	No Rating
≤ ½-Lite	All Zones	≤ 0.23	≤ 0.23
> ½-Lite	Northern	≤ 0.26	≤ 0.40
	North-Central		
	South-Central	≤ 0.28	≤ 0.23
	Southern		



Criteria Effective
Oct. 23, 2023

Air Leakage for Sliding Doors ≤ 0.3 cfm/ft²
Air Leakage for Swinging Doors ≤ 0.5 cfm/ft²
¹ Btu/h·ft²·°F
² Solar Heat Gain Coefficient

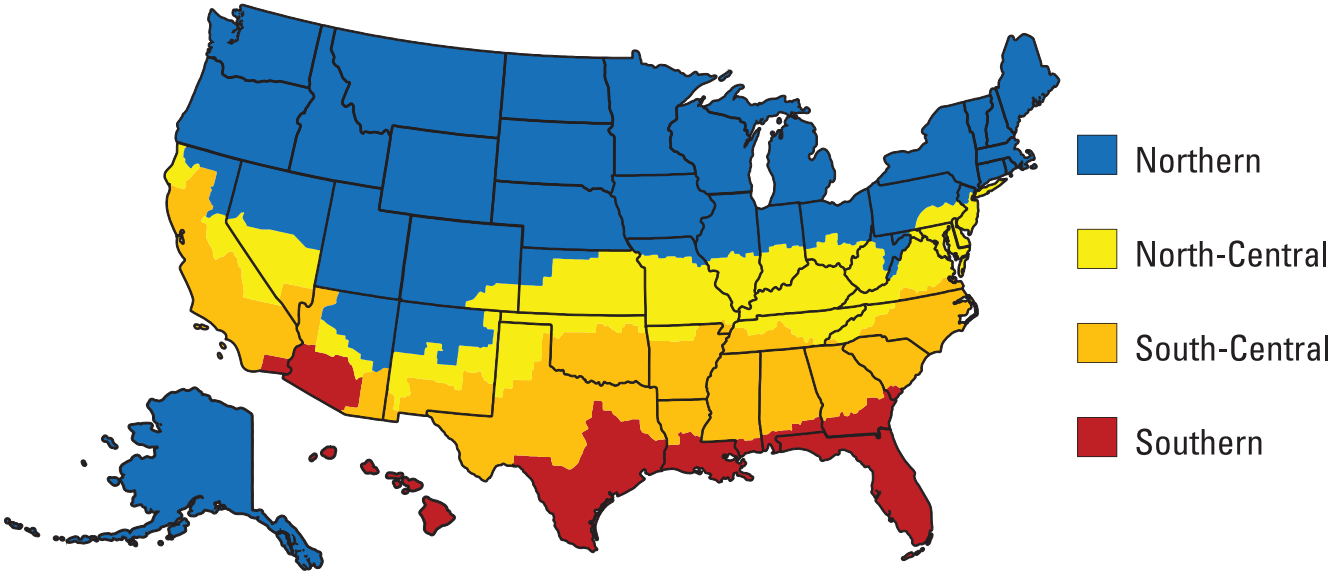

Note: A complete list of ENERGY STAR Climate Zones by states and country or, where applicable, zip code is available at www.energystar.gov/products/building_products/residential_windows_doors_and_skylights/climate_zone/search

ENERGY RATINGS

Feather River NFRC Labels





National Fenestration
Rating Council®
CERTIFIED



TRINITY GLASS
INTERNATIONAL

Direct Glazed Fiberglass
Entry Door

1/4 Lite| PVC Jamb: Optilite S1|16/Air/Lami
(3mm/9mm) 1" IG

TGI-M-11-00160-00001

ENERGY PERFORMANCE RATINGS	
U-Factor (U.S. / I-P)	Solar Heat Gain Coefficient
0.19	0.08

ADDITIONAL PERFORMANCE RATINGS	
Visible Transmittance	Air Leakage (U.S. / I-P)
0.10	≤0.3

Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult manufacturer's literature for other product performance information.
www.nfrc.org



National Fenestration
Rating Council®
CERTIFIED



TRINITY GLASS
INTERNATIONAL

Direct Glazed Fiberglass
Entry Door

1/2 Lite| PVC Jamb: Optilite S1|16/Air/Lami
(3mm/9mm) 1" IG

TGI-M-11-00192-00001

ENERGY PERFORMANCE RATINGS	
U-Factor (U.S. / I-P)	Solar Heat Gain Coefficient
0.21	0.15

ADDITIONAL PERFORMANCE RATINGS	
Visible Transmittance	Air Leakage (U.S. / I-P)
0.19	≤0.3

Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult manufacturer's literature for other product performance information.
www.nfrc.org

ENERGY STAR® Certified in Highlighted Regions



ENERGY STAR



energystar.gov/windows  **Certified**

rev 3.26 LBESST110160

ENERGY STAR® Certified in Highlighted Regions



ENERGY STAR



energystar.gov/windows  **Certified**

rev 3.26 LBESST110192

ENERGY RATINGS

Feather River NFRC Labels





**TRINITY GLASS**
INTERNATIONAL
Direct Glazed Fiberglass
Entry Door
3/4 Lite| PVC Jamb: Optilite S1|16/Air/Lami
(3mm/9mm) 1" IG
TGI-M-11-00224-00001

ENERGY PERFORMANCE RATINGS	
U-Factor (U.S. / I-P)	Solar Heat Gain Coefficient
0.23	0.19
ADDITIONAL PERFORMANCE RATINGS	
Visible Transmittance	Air Leakage (U.S. / I-P)
0.25	≤0.3

Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult manufacturer's literature for other product performance information.
www.nfrc.org

ENERGY STAR® Certified in Highlighted Regions


energystar.gov/windows  **Certified**
rev 3.26 LBESST110224



**TRINITY GLASS**
INTERNATIONAL
Direct Glazed Fiberglass
Entry Door
Full Lite| PVC Jamb: Optilite S1|16/Air/Lami
(3mm/9mm) 1" IG
TGI-M-11-00256-00001

ENERGY PERFORMANCE RATINGS	
U-Factor (U.S. / I-P)	Solar Heat Gain Coefficient
0.25	0.25
ADDITIONAL PERFORMANCE RATINGS	
Visible Transmittance	Air Leakage (U.S. / I-P)
0.33	≤0.3

Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult manufacturer's literature for other product performance information.
www.nfrc.org

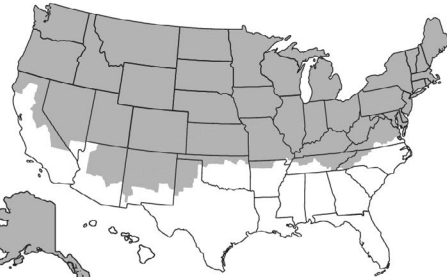ENERGY STAR® Certified in Highlighted Regions

energystar.gov/windows  **Certified**
rev 3.26 LBESST110256